



1 2 3 4 5 6 7 8 9


F

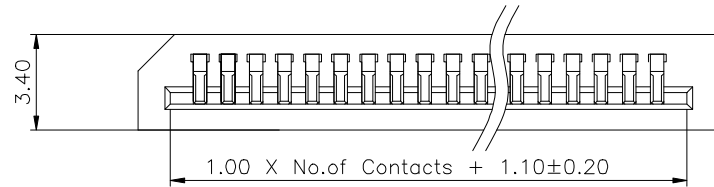

E

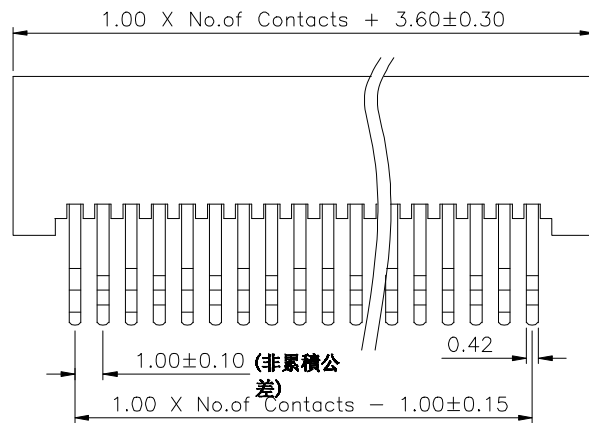

D



C

**Specifications**



Current Rating: 0.5Amp  
 Voltage Rating: 125V/AC  
 Insulation Resistance: 500M ΩMin.  
 Dielectric Withstanding: 500V AC/DC  
 Contact Resistance: 30mΩ Max.  
 Operating Temperature: -25°C to +85°C

**Materials**



Contact Material: Phosphor Bronze  
 Insulation Material: High Temperature Thermoplastic,  
 UL 94V-0 Nylon46 or the equivalent material.  
 All materials must meet Greenconn requirement  
 for environment protection.

B

**Ordering Information**

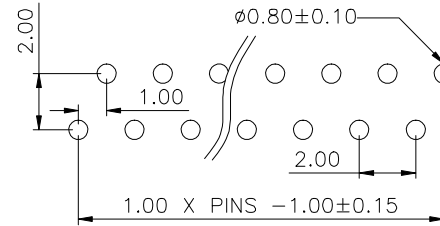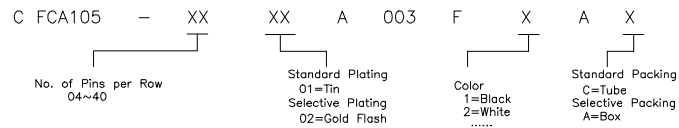

P.C.B LAYOUT

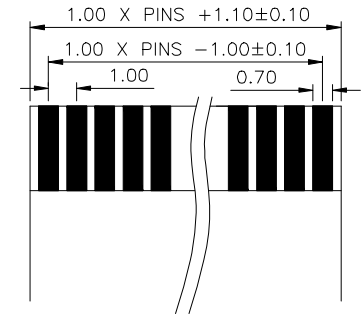

FPC Dimension Reference

A

**格稜股份有限公司**  
**Greenconn Corporation**

**GENERAL TOLERANCE**

X.* ± 5.0*	X. ± 0.30
.X* ± 3.0*	.X ± 0.25
.XX* ± 2.0*	.XX ± 0.15
.XXX* ± 1.0*	.XXX ± 0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DRAWING	CFCA105-CA3FA
PART NO.	CFCA105-XX XX A003FXAX

TITLE	1.00mm PITCH FPC
-------	------------------

REV.	07	UNIT.	mm	SCALE.	5:1	PAGE.	1/1
------	----	-------	----	--------	-----	-------	-----

1 2 3 4 5 6 7 8 9